


Plummer Blocks

Series S 5 and S 6
for bearings with adapter sleeves

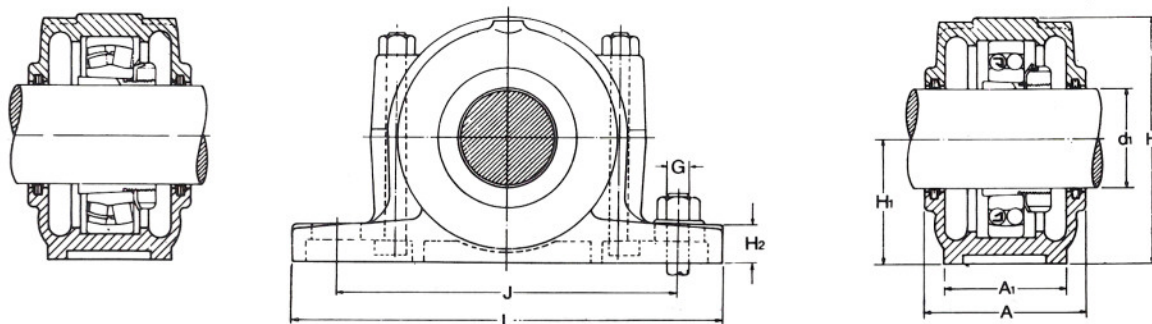

Housing										Housing											
Shaft			Dimensions							Shaft			Dimensions								
dia.										dia.											
Designation	d ₁	A	A ₁	H	H ₁	H ₂	J	L	G	Designation	d ₁	A	A ₁	H	H ₁	H ₂	J	L	G		
mm. inch.			mm.							mm. inch.			mm.								
S 505	20	¾	65	52	76	40	16	130	170	½	S 605	20	¾	78	55	95	50	16	150	196	½
S 506	25	1	76	54	90	50	19	150	190	½	S 606	25	1	80	55	100	50	16	150	196	½
S 507	30	1¼	80	52	95	50	20	150	190	½	S 607	30	1¼	90	62	115	60	20	170	215	½
S 508	35	1¼	86	60	115	60	25	170	205	½	S 608	35	1¼	95	64	120	60	21	170	215	½
S 509	40	1½	88	60	115	60	25	170	215	½	S 609	40	1½	105	75	130	70	28	210	270	5⁄8
S 510	45	1¾	88	60	115	60	25	170	215	½	S 610	45	1¾	110	75	140	70	28	210	270	5⁄8
S 511	50	2	100	72	130	70	28	210	255	5⁄8	S 611	50	2	116	85	155	80	28	230	290	5⁄8
S 512	55	2¼	105	75	135	70	30	210	275	5⁄8	S 612	55	2¼	116	85	160	80	28	230	295	5⁄8
S 513	60	2½	110	82	155	80	28	230	295	5⁄8	S 613	60	2½	128	94	185	95	28	260	335	¾
S 514	60	2¾	112	82	157	80	28	235	287	5⁄8	S 614	60	2¾	128	94	190	95	32	265	330	¾
S 515	65	2½	113	82	160	80	32	230	290	5⁄8	S 615	65	2 ½	140	104	200	100	35	290	360	¾
S 516	70	2¾	125	90	180	95	32	260	330	¾	S 616	70	2 ¾	145	112	215	112	36	300	365	¾
S 517	75	3	125	90	185	95	34	260	320	¾	S 617	75	3	150	112	218	112	36	320	405	¾
S 518	80	3¼	140	105	200	100	35	290	363	¾	S 618	80	3¼	163	120	250	125	34	350	420	¾
S 519	85	3¼	140	100	215	112	37	290	363	¾	S 619	85	3¼	165	120	245	125	35	350	420	¾
S 520	90	3½	157	114	220	112	37	320	405	¾	S 620	90	3½	175	120	275	140	41	350	420	7⁄8
S 522	100	4	173	120	240	125	43	350	425	¾	S 622	100	4	190	130	300	150	43	390	463	7⁄8
S 524	110	4¼	175	120	275	140	41	350	420	7⁄8	S 624	110	4¼	190	160	325	160	50	450	530	1 1⁄8
S 526	115	4½	175	130	290	150	45	380	450	7⁄8	S 626	115	4½	210	160	345	170	50	470	555	1 1⁄8
S 528	125	5	187	150	305	150	45	420	505	1 1⁄8	S 628	125	5	240	172	380	180	54	520	630	1¼
S 530	135	5¼	190	160	325	160	50	450	530	1 1⁄8	S 630	135	5¼	248	172	390	190	60	565	680	1¼
S 532	140	5½	210	160	345	170	50	470	555	1 1⁄8	S 632	140	5½	255	190	425	200	60	580	710	1¼
S 534	150	6	240	172	380	180	54	520	630	1¼	S 634	150	6	272	205	445	212	60	610	750	1¼
S 536	160	6½	248	172	390	190	60	565	680	1¼	S 636	160	6½	277	230	490	235	62	650	785	1½
S 538	170	6¾	255	190	425	200	60	580	710	1¼	S 638	170	6¾	305	234	520	247	68	724	873	1½
S 540	180	7	272	205	445	212	60	610	750	1¼	S 640	180	7	305	234	520	247	68	724	873	1½
S 544	200	8	277	230	490	235	62	650	785	1½											
S 548	220	9	305	234	520	247	68	724	873	1½											